


## Plug XL-446

Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads.

With rigid insulating sleeve.

**Screw connection.**

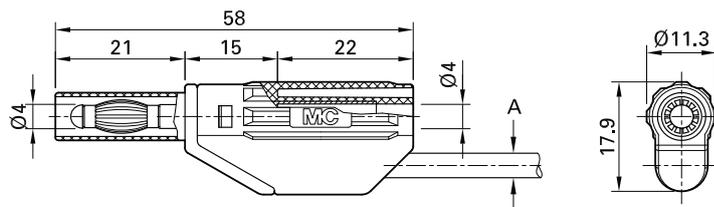

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
66.9706-*	XL-446	600 V, CAT II / 32 A	max. Ø 3.9 mm    max. 2.5 mm <sup>2</sup>	Ni	21 22 23 24



Assembly instructions MAH501

[www.staubli.com/electrical](http://www.staubli.com/electrical)



Optional colors 20 25 26 27 29


Further information, page 6

## Plug XL-459/30

Stackable, Ø 4 mm, with spring-loaded MULTILAM, for self-assembly of test leads.

With rigid insulating sleeve. With 30° cable outlet.

**Screw connection.**

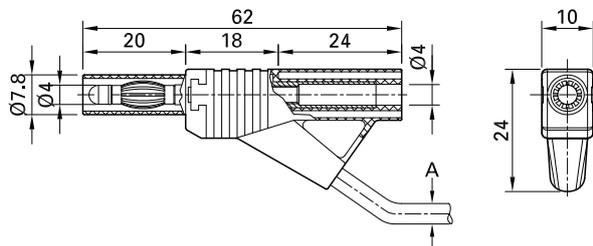

Order No.	Type	Rated voltage/current	Cable (A)		*Standard colors
66.9649-*	XL-459/30	1000 V, CAT II / 32 A 600 V, CAT III / 32 A	max. Ø 3.9 mm    max. 2.5 mm <sup>2</sup>	Ni	21 22 23 24 25



Assembly instructions MAH502

[www.staubli.com/electrical](http://www.staubli.com/electrical)



Optional colors 26 27 29

Further information, page 6