


Panel-mount socket LB-I4R-A


Insulated, Ø 4 mm, rigid. Machined brass.
Metal thread jacket on the insulation. The socket can be screw-mounted in predrilled panels. Available with hexagonal nut.





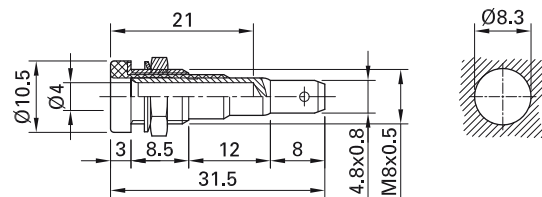



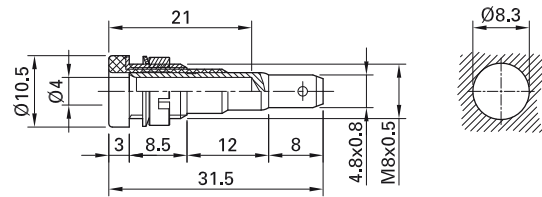





























Flat connecting tab 4.8 mm x 0.8 mm.

LB-I4R-A



LB-I4R-A



Order No.	Type	Rated voltage/current	Nut		*Standard colors										
23.0190-*	LB-I4R-A	30 VAC / 25 A 60 VDC / 25 A	Hexagonal nut		<table><tr><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td></tr></table>										
															
															
23.0180-*	LB-I4R-A	30 VAC / 25 A 60 VDC / 25 A	Round Nut		<table><tr><td></td><td></td></tr></table>										
															

Component parts

23.6333-*	BI-LB-I4R-A	Socket without nut
Page 166	MU/M8x0,5	Hexagonal Nuts
Page 167	MUR/M8x0,5	Round Nut
Page 167	SP4	Washer



Optional colors 20 23 24 25 26 27 28 29

Further information, page 6



Flat connecting FSH4,8x0,8, page 170